


# RAPID AL

MEETS THE HIGHEST REQUIREMENTS

OF HYGIENE AND SAFETY





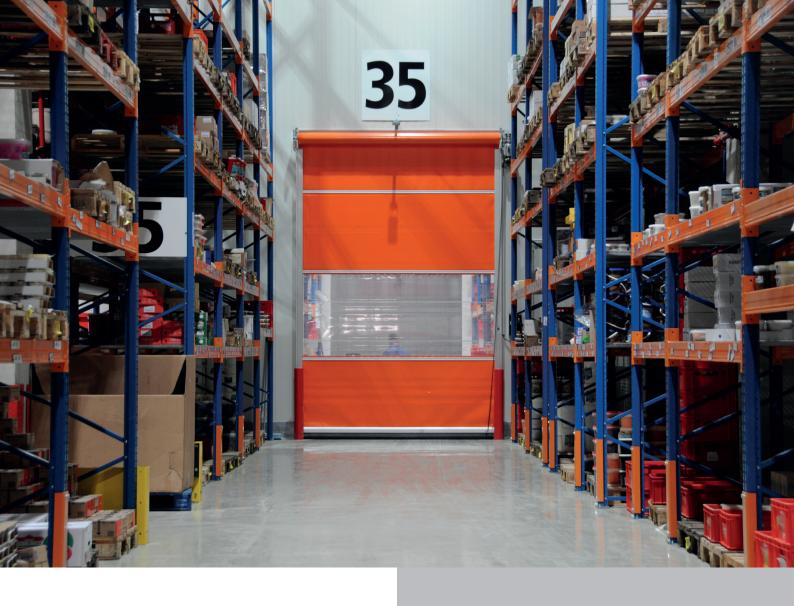

### **ADVANTAGES** AT A GLANCE



Opening speed up to 2.0 m/s



Door size up to 5.0 m x 5.0 m



Lowest lintel requirements



Crash protection



Wide color range




Clean room, chemical, pharmaceutical and Atex



For supermarkets, food and in refrigerated or freezer areas down to -28°

## **SPECIAL FEATURES**

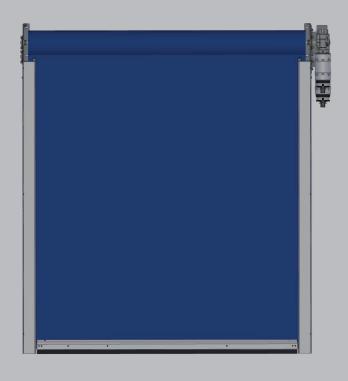

# COMPACT AND FAST

The stable and self-supporting construction requires little lateral space.


The close-fitting fabric curtain not only fulfills a high level of tightness but is also flexible and rich in variants.

The high-speed roll-up door of the Minirapid product line consists of a sophisticated modular system.

This makes it possible to cover a wide range of applications.









Drive and bale cover



Light grid



Anti-crash function



Crash in the side guides

#### **TECHNICAL DATA**

- Opening speed up to 2.0 m/s
- Closing speed up to 0.8 m/s
- Resistance to wind load up to class 1
- Door sizes up to 5.0 m high and 5.0 m wide
- DR2100 microprocessor control system with main switch and integrated frequency converter
- 230 V/50Hz, IP54 Operator
- Required lintel height min. 345 mm
- Curtain available in various colors or fully printed with a motif of your choice

### **SAFETY**

- Passage monitoring by means of contactless light grid
- Anti-crash function (optional)
- Emergency opening by hand crank or reel chain
- Signal lights and traffic light control (optional)



**SPIRAL DOORS** 



**FOLDING DOORS** 



HORIZONTAL HIGH-SPEED DOORS



VERTIKAL HIGH-SPEED DOORS



**SWING DOORS** 



STRIP CURTAINS



**MACHINE PROTECTION DOORS** 



**SECTIONAL DOORS** 



STEEL / ALUMINUM ROLLER DOORS

#### SCOPE OF APPLICATION





















**INDUSTRY** 

**TRANSPORT** 

**LOGISTICS** 

AUTOMOTIVE M. PROTECTIONS CLEAN ROOM SUPERMARKET

FOOD

**COOLING AREA** 

**ATEX** 

**ITW Industrietore GmbH** Adolf-Kolping-Straße 14

73072 Donzdorf Germany

Tel. +49 7162 9129-60 Fax +49 7162 9129-64 info@itw-torsysteme.de www.itw-torsysteme.de

