

SPRINT

FAST, ROBUST AND FULL HEIGHT

THROUGH HORIZONTAL OPENING







ADVANTAGES AT A GLANCE

Opening speed up to 3.0 m/s

Door size up to 6.0 m x 6.0 m

Resistance to wind load up to class 2

Low dripping requirement

Crash protection


Escape route (optional)

Can be used indoors and outdoors

In the area of transport systems

For food processing plants also available in stainless steel design

SPECIAL FEATURES

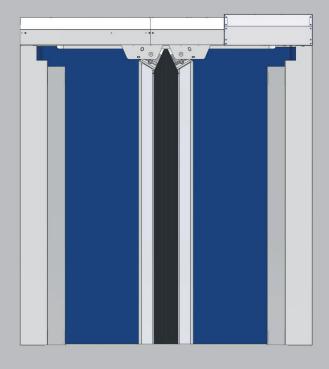

IMMEDIATELY FULL CLEARANCE


The lateral opening of the gate wings enables the immediate provision of the complete gate height and thus ensures fast and safe traffic of goods. This guarantees a trouble-free and safe traffic flow and prevents long interruption times.

Due to the horizontal opening and closing cut-outs for e.g. pipes and conveyor belts which pass through the door - are possible. In addition, the door division can be asymmetrical or single-winged.

In the stainless steel version, the Transsprint meets the hygienic requirements of food, chemical and pharmaceutical industries.











Transsprint - Single Wing

Transsprint - Asymmetrical with two separate drives and controls





Transsprint C with

Crash protection

Lintel requirement

250 mm

TECHNICAL DATA

- Opening speed up to 3.0 m/s
- Closing speed up to 1.5 m/s
- Door sizes up to 6.0 m height and 6.0 m width
- DR2100 microprocessor control system with
- main switch and integrated frequency converter 230 V/50Hz, IP66 drive
- Emergency stop switch and 3-fold push button in steel control cabinet
- Lintel height min. 250 mm, depending on the door size and design

SAFETY

- Access protection due to all-round cladding
- Surveillance light barrier or Safety contact strip in each closing beam
- Drive-through monitoring by means of non-contact light grid (optional)
- Anti-crash function (optional)
- Emergency opening door, can be pushed open manually
- Signal lights and traffic light control (optional)

OUR FURTHER PRODUCT RANGE



SPIRAL DOORS



VERTIKAL HIGH-SPEED DOORS



MACHINE PROTECTION DOORS



FOLDING DOORS



SWING DOORS



SECTIONAL DOORS



HORIZONTAL HIGH-SPEED DOORS



STRIP CURTAINS



STEEL / ALUMINUM ROLLER DOORS

SCOPE OF APPLICATION



ITW Industrietore GmbH Adolf-Kolping-Straße 14

73072 Donzdorf Germany Tel. +49 7162 9129-60 Fax +49 7162 9129-64 info@itw-torsysteme.de www.itw-torsysteme.de

